

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
22 January 2004 (22.01.2004)

PCT

(10) International Publication Number  
**WO 2004/007268 A1**

(51) International Patent Classification<sup>7</sup>: **B62J 1/04**, 1/00

(21) International Application Number:  
PCT/IT2003/000440

(22) International Filing Date: 16 July 2003 (16.07.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
PI2002A000039 16 July 2002 (16.07.2002) IT

(71) Applicant and

(72) Inventor: **BERTELLONI, Pietro** [IT/IT]; 24, Via  
Venezia, I-54100 Massa (IT).

(74) Agents: **BARDINI, Marco, Luigi et al.**; Società Italiana  
Brevetti S.p.A., Corso dei Tintori, 25, I-50122 Firenze (IT).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: SEAT FOR A TWO-WHEELED VEHICLE

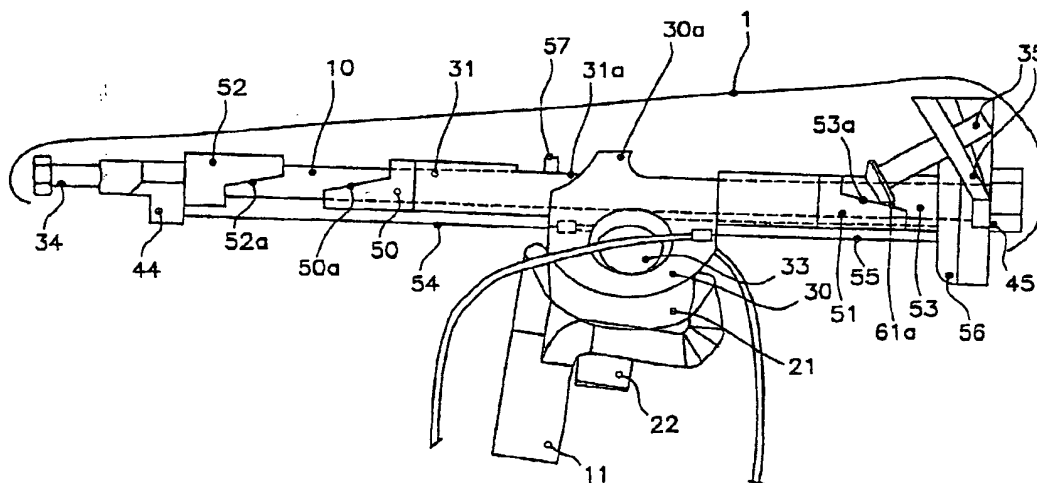

(57) Abstract: A seat for two-wheeled vehicles, such as bicycles, motorcycles and scooters, comprising a relatively soft saddle support (1) to bear the rider and a supporting structure (2, 3, 4 and 5) of the saddle support by means of which the support is connected to the seat-carrying upright (11) of the vehicle. Between the supporting structure and the upright of the vehicle there is provided a longitudinal pin (10) around whose longitudinal axis the relatively soft support can oscillate, whereas between the pin and the supporting structure there are provided means of blocking the oscillation of said pin. In particular, there are provided means for regulating the amplitude of the oscillation around the axis of the pin.

WO 2004/007268 A1

10/521996

BT18 Rec'd PCT/PTO

14 JAN 2005

- 1 -

TITLE

SEAT FOR A TWO-WHEELED VEHICLE

DESCRIPTIONField of the Invention

5 The present invention relates to a seat for two-wheeled vehicles, bicycles, motorcycles and scooters for example, capable of oscillating around its longitudinal axis.

Background of the Invention

10 It is well known that when a cyclist pushes on the pedal, the upper internal part of his thigh rubs against the parts of the seat with which it is in contact and that this causes rubefaction and discomfort. Furthermore, the seat's rigid response to the movements carried out during  
15 the pedalling contributes in a not negligible manner to the feeling of discomfort typically associated with remaining for a long time on the seat of a bicycle and, after all, to the strain felt by the cyclist.  
The document EP 0 093 016 discloses a seat for a bicycle according to  
Object and summary of the Invention. The preamble of claim 1.

20 The general purpose of the present invention is to provide a seat for two-wheeled vehicles that will make it possible to avoid the drawbacks that have just been outlined.

25 A particular aim of the present invention is to provide a seat of the aforementioned type that will be capable of oscillating about its longitudinal axis and such that said oscillation can be locked.

30 Another aim of the present invention is to provide a seat of the aforementioned type in which the amplitude of the oscillation about its longitudinal axis can be adjusted.

- 2 -

A further aim of the present invention is to provide a seat of the aforementioned type in which the oscillation is associated with the possibility of the seat sliding in the longitudinal direction in such a way as to permit the seat configuration to be adapted in an optimal manner to the road on which the cyclist is moving.

These aims are attained by the seat in accordance with the invention of which the essential features are specified in claim 1. Further important characteristics are set out in the dependent claims.

The salient feature of the seat for two-wheeled vehicles in accordance with the present invention consists in that it is mounted on a pin capable of oscillating around its longitudinal axis and that there are provided means capable of both locking the oscillations and regulating their amplitude.

#### Brief description of the drawings

Other features and advantages of the seat for two-wheeled vehicles in accordance with the present invention will be brought out more clearly by the following description of some embodiments thereof, which is given by way of example and is not to be considered limitative in any way, the description making reference to the attached drawings, of which:

- Figure 1 is a bottom plan view of the two-wheeled vehicle seat in accordance with the invention;

- Figure 2 is a longitudinal section through the seat along lines II-II of Figure 1;

- Figure 3 is an enlarged view of the detail surrounded by a circle in Figure 2;

- Figure 4 is a schematic longitudinal section through a variation of the seat of Figures 1 - 3;

- 3 -

- Figure 5 is a schematic longitudinal view of a second embodiment of the seat in accordance with the invention;

- Figure 6 is a schematic side elevation of a third embodiment of the seat in accordance with the invention;

- Figure 7 is a schematic side elevation of a fourth embodiment of the seat in accordance with the invention;

- Figure 8 is a simplified variation of the seat in accordance with the invention;

- Figure 9 is a fifth embodiment of the seat in accordance with the invention;

- Figures 10, 11 and 12 illustrate other possible solutions for the means of regulating the amplitude of the oscillation of the seat.

#### Detailed description of the Invention

Referring to Figures 1-3, the reference number 1 has been used to indicate a support that bears the rider and constitutes the upper part of the bicycle seat, or saddle pad, made of a yielding and soft material (leather, plastic or similar) and is provided with a lower part constituting the supporting structure made up of the crosspieces 2 and 3, indicated respectively as the forward and the rearward crosspiece, which are made of rigid material and are connected to each other by the round bars 4 and 5.

In the forward crosspiece 2 there is housed a first bushing or bearing 6, while a second bushing or bearing 7 is applied to the rearward crosspiece 3 by means of a strip 8 fixed to the crosspiece 3 by means of screws 9. The two ends of a pin 10 that extends longitudinally and

- 4 -

is rigidly connected to the upright 11 carrying the saddle are rotatably housed in the two supports 5 and 7.

Pin 10 is provided with a stiffening plate 12 that facilitates the longitudinal sliding and enhances the flexural rigidity of the pin. Pin 10 also has a first shoulder 13 that acts as a stop for the first support 6 and, at the opposite end, a second shoulder 12 that acts as a stop for the second support 7. As can better be seen in Figure 3, second shoulder 14 is of a substantially discoidal shape with a radial notch 14a. A ratchet 15 is attached to the crosspiece 13 by means of a strip 16 and screws 17 and can slide across it in a position corresponding to notch 14a of shoulder 14. Ratchet 15 is provided with a small lever 18 to permit its being easily gripped and made to slide across the crosspiece 3. When it is desired to lock the oscillation of the saddle 1, ratchet 15 has to be slid until it engages with notch 14a. When the ratchet is not engaged with notch 14a, the saddle can oscillate freely. Two end-of-run stops, indicated by 19 and 20, are provided on the ratchet and correspond, respectively, to the positions in which the ratchet is disengaged from notch 14a and engaged with it.

The position of saddle 1 with respect to upright 11 can be regulated by causing pin 10 to slide with respect to head 21 of upright 11 after having slackened locking screw 22.

Alternatively, the supports 6 and 7 can be provided with rubber articulations of a known type to perform the same function.

In the variation of Figure 4, where components equal to those of the previous figures are always indicated by the same reference number, round bars 15 (one only can be

- 5 -

seen in Figure 4, the other or the others being hidden by it), which form part of the supporting structure of saddle 1 and are rigidly locked to the head of saddle-carrying upright 11 by means of the tightening of screw 22, converge onto two pins 23 and 24 that are rotatably engaged in small blocks 2 and 3 of saddle 1, where the blocks may or may not be provided with a rolling support. A device, generically indicated by 26, is also provided for locking seat 1 with respect to pins 23 and 24, and may be, for example, of the type illustrated in Figures 1 - 3 or some equivalent device.

In order to limit the torsion between the front and the rear part of saddle 1, one or more metal ribs, indicated by the reference number 27, made of metal or some other torsion-resisting material, may advantageously be inserted in it.

The supporting structure, indicated by 25 in Figure 4, may also be made of just one appropriately sized round bar or other metallic rod of which the ends act as trunnions. The size of the trunnions is such that they can safely be inserted in seatings 2 and 3 without there being any risk of their slipping out and to this end they may also be provided with appropriate locking systems of a conventional type.

Another embodiment of the invention is illustrated by Figure 5, where components identical to those of the previous embodiments are indicated by the same reference numbers. According to this embodiment, head 21 of saddle holding upright 11 has a concave end 11a in which there is arranged the complementarily shaped base of a block 20 that has a tubular longitudinal guide 31 rigidly connected to it. The relative position of block 30 with respect to

- 6 -

head 21 of upright 11 makes it possible to regulate the inclination of saddle 1. The locking of block 30 with respect to head 21 is obtained by tightening screw 22 that engages with a hollow plug 33 passing transversely through block 30. Pin 10 is rendered integral with saddle 1 by means of fixing devices generically indicated by 34 and 35 and is slidingly mounted inside tubular guide 31. The oscillation of saddle 1 is controlled by a mechanism 36 of the type, for example, illustrated in Figures 10 - 12. The sliding of saddle 1 with respect to head 21 of upright 11 is controlled by means of a pair of sheathed tension cables 37 and 38 acting in opposition to each other and remotely operated, for example by means of a small lever under the saddle generically indicated by 39.

Another embodiment of the invention is illustrated by Figure 6, where components identical to those of the previous embodiments are again indicated by the same reference numbers. As in the embodiments of Figures 4 and 5, this embodiment comprises a tubular guide 31 integral with a block 30 that can be tightened on head 21 of upright 11 by means of screw 22 and plug 33. Longitudinal pin 10 is rendered integral with the saddle 1 by means of connections 34 and 35, so that saddle 1 may slide and oscillate integrally with it. Coaxially fixed to tubular guide 31, on one side with respect to block 30, there is a sleeve 40, one end of which has an axially inclined portion 40a obtained by removing a roughly semi-annular portion of its side wall.

A sleeve 42, coaxial with sleeve 40 and integral with pin 10, has an end 41a correspondingly inclined, obtained in the same manner, and counterposed to end 40a of sleeve 40 in such a manner that it can become coupled with it

- 7 -

following the sliding of pin 10 controlled by a sheathed tension cable 42 connected to block 30 and capable of being operated by, for example, a small lever (not shown) situated beneath the saddle. The action of the tension  
5 cable is opposed by a spring 43 coaxial with pin 10 and arranged between the end of tubular guide 31 on the side of block 30 opposite to sleeve 40 and a stop 44 fixed to the end of pin 10. The end of the tension cable is also attached to stop 44.

10 When the two inclined ends 40a and 41a of, respectively, sleeves 40 and 41 have come to constitute a perfect fit as shown in Figure 7, all further rotation of pin 10 within tubular guide 32 is prevented. On the other hand, as the two sleeves 40 and 41 move away from each  
15 other due to the effect of the traction applied by tension cable 42, the amplitude of the oscillation that pin 10 is allowed to perform will increase. Spring 43 acts in opposition to tension cable 42 and therefore tends to keep the two inclined surfaces 40a and 41 in the position in  
20 which they form a perfect fit.

It should be noted that in the illustrated embodiments the seating plane of the saddle is inclined forward with respect to pin 10, which is substantially horizontal. In practice, the rear of pin 10 will be  
25 lowered from 10 to 80 mm with respect to the seating plane of the seat 1.

It should also be noted that in the embodiment illustrated by Figures 5 and 6 there is provided a rearward nut 45 that can be screwed onto pin 10 and  
30 therefore makes it possible to tension soft support 1 of the seat.



- 8 -

Figure 7 illustrates yet another embodiment of the oscillating seat in accordance with the invention that renders possible controlled oscillation and or lockage of the oscillation of the seat both in a rearward and a forward position thereof. This embodiment is particularly advantageous, above all, for sporting and competitive activities, because the advanced position of the seat is the one generally preferred for uphill routes, while the rearward position is preferred for downhill routes. The possibility of controlling the oscillation of the seat in both these positions therefore appreciably improves its performance.

Referring to Figure 7, the saddle in accordance with this embodiment is still of the type in which there is provided a tubular guide 31 for an oscillation pin 10 integral with a block 30 mounted in an adjustable manner on head 21 of saddle-carrying upright 11 by the tightening of a bolt 22 that arrests a stem 33 passing transversely through block 30. Fixed to the two ends of tubular guide 31 there are two sleeves 50 and 51 coaxial with pin 10 and both provided with inclined ends 50a and 51a. Two further sleeves 52 and 53 integral with pin 10 and coaxial with it are provided with inclined ends 52a and 53a opposed to the respective inclined ends 50a and 51a of sleeves 50 and 51. Two sheathed portions 54 and 55 of a single tension cable are fixed with their respective ends to stop 44 integral with one end of pin 10 and to a further stop 56 integral with the other end of the same pin 10. The two portions 54 and 55 of the tension cable converge onto a common activation device (not shown), a lever situated under the seat for example, thanks to which it is possible at one and the same time to make pin 10 slide in tubular guide 31

- 9 -

and to regulate the amplitude of the oscillation, right to the point of locking it, in the two positions, i.e. respectively with the seat pushed forward or with the seat pushed backward.

5 In the configuration illustrated by Figure 7 the seat is pushed completely forward and all rotation is prevented by the fact that the two inclined ends 51a and 53a constitute a perfect fit. Traction applied to the portion 54 of the tension cable will produce the gradual  
10 disengagement of the aforesaid inclined ends, but will bring the inclined ends 50a and 52a closer together and eventually make them constitute a perfect fit when the saddle reaches its rearward position, where the possibility of rotation is once again prevented. In all  
15 the intermediate positions, on the other hand, oscillation will be possible with an amplitude that gradually increases as the two inclined ends 51a and 53a move away from each other in the forward position, and then gradually decreases as the inclined ends 50a and 52a come  
20 closer to each other in the rearward position.

With a view to making it possible for the oscillation to be locked also in a position intermediate between the completely advanced position and the completely rearward position, there is provided a locking device consisting of  
25 a tooth 57 integral with pin 10 and projecting from a slot 31a situated in a central position on tubular guide 31. Locking of the rotation will be obtained when, due to the sliding of pin 10, tooth 57 comes to be situated within a corresponding vault defined by an arched portion 30a of  
30 block 30 bridging over tubular guide 31.

In a simplified variation of the invention, which is illustrated by Figure 8, pin 10 is a threaded pin integral

- 10 -

with saddle 1 and engaged within tubular guide 31 integral with saddle-carrying upright 11, the tubular guide being likewise threaded on its inside. At the rearward end of pin 10 there is provided a knob 59 by means of which pin 5 can be rotated and therefore moved forward and backward. A mechanism for adjusting and blocking the oscillation of the previously mentioned type is also provided, so that rotation of the aforesaid knob also makes it possible to adjust the amplitude of the oscillation or eventually to 10 lock it completely. In particular, said mechanism comprises an inclined plate 60 that extends between an end of tubular guide 31 and a similarly inclined check wall 61 integral with the saddle. As inclined plate 60 approaches check wall 61 due to the translation of pin 10, the 15 oscillation amplitude of the pin will become gradually reduced and eventually completely locked when plate 60 fits perfectly against wall 61.

Given its constructional simplicity, the oscillation mechanism shown in Figure 8 can also be employed for 20 converting conventional saddle into oscillating saddle that can be adjusted in the longitudinal direction.

In the embodiment of the seat in accordance with the invention illustrated by Figure 9 the supporting structure of the saddle comprises a longitudinal groove 62 in which 25 pin 10 is arranged in such a manner as to be able to slide. Its sliding in one direction or the other is controlled by a pair of tension cables 63 and 64 that converge on an activation device, a lever for example, similar to the one provided for the embodiments 30 illustrated by Figures 5 and 7. Pin 10 may also rotate within groove 62 and is provided with an oscillation control and lockage mechanism generically indicated by 65.

- 11 -

This mechanism may be of the type used in Figures 10, 11 and 12, According to the variation of Figure 10, pin 10 has a radial rib 66 that engages with a flared groove 67, i.e. a groove of a substantially triangular section provided on a small block 68 that can slide in a seating 69 integral with the supporting structure of the saddle. The sliding of small block 68 is obtained by rotating a screw 70 fixed with respect to seating 69 and screwed into block 68. As the block comes gradually closer to rib 66, the amplitude with which pin 10 is allowed to oscillate will become reduced and eventually completely locked.

In the variation of Figure 11, on the other hand, radial rib 66 extends between a pair of adjustment screws 71 and 72 axially facing to each other and screwed into the side walls of seating 69. In this case adjustment of the oscillation amplitude is obtained by tightening or slackening screws 71 and 72 to increase or decrease the space between them.

In the variation of Figure 12 pin 10 is provided with a groove 73 that engages with prismatic tooth 74 having a triangular section and projecting from a small block 75 that can be made to slide within seating 69 by acting on screw 70. In this case the reduction of the oscillation amplitude of pin 10 and its eventual locking are obtained as the tooth 74 is gradually pushed further into groove 73 of pin 10.

Though the present description makes reference for the most part to seats for bicycles, the invention also extends to the seats of other two-wheeled vehicles. For example, the possibility of having an oscillating seat may be advantageous in competition motorcycles, because the oscillation of the seat will accompany the rider in the

- 12 -

bends. The oscillatory motion makes it possible to use larger and more ergonomic seats.

The seat in accordance with the invention can be readily dismantled by simply unscrewing screw 22 and, in 5 the versions in which it is provided, pulling plug 33 out of block 30, so that in this way a seat of any other shape can be mounted.

CLAIMS

1. A seat for two-wheeled vehicles, such as bicycles, motorcycles and scooters, comprising a relatively soft saddle support (1) to bear the rider and a supporting structure (2, 3, 4 and 5) by means of which said support is connected to the seat-carrying upright (11) of the vehicle, whereby between said supporting structure (2, 3, 4, 5) and said upright (11) there is provided an oscillatable pin (10) and means suitable for preventing the oscillation of said pin (10) being provided between said pin (10) and said supporting structure (2, 3, 4, 5) characterized in that said pin (10) is extending in the longitudinal axis of the seat around which axis said relatively soft saddle support (1) can oscillate.
2. A seat in accordance with claim 1, comprising also means for adjusting the amplitude of the oscillation around the axis of said pin.
3. A seat in accordance with claim 1 or claim 2, wherein said pin (10) is rigidly connected to said upright (11) and rotably connected to said supporting structure (2 and 3).
4. A seat in accordance with claim 1 or claim 2, wherein said pin (10) is integral with said supporting structure (2, 3) and is connected to said upright (11) in such a manner as to be able to slide and turn.
5. A seat in accordance with claim 4, wherein a tubular guide (31) within which said pin (10) is mounted in such a manner as to be able to slide and turn is integrally connected to said upright (11), means (37, 38, 42, 54, 55, 59) being provided for controlling the sliding of said pin within said tubular guide.
6. A seat in accordance with claim 5, wherein said means for controlling the sliding of said pin within said tubular guide comprise pulling means (37, 38, 42, 54, 55)

- 14 -

that extend between said upright and at least one end of said pin and are connected to a remote actuation device (39).

5 7. A seat in accordance with claim 5, wherein said pin is threaded and said tubular guide is threaded on the inside, manual actuating means (59) being provided at one end of said pin to impart an angular displacement to said pin capable of causing the pin to slide within said guide.

10 8. A seat in accordance with any one of the preceding claims, wherein said means for locking the oscillation comprise an element (15) that slides on the supporting structure (3) and a seating (14a) integral with said pin (10), said sliding element being positioned on said structure in such a way as to be aligned with said seating  
15 to become engaged within it to lock the oscillation or to become disengaged therefrom to permit the oscillation.

9. A seat in accordance with any one of Claims 4 to 7, wherein said means for locking the oscillation of the pin also make it possible to regulate the amplitude of the  
20 oscillation and comprise at least one sleeve (40) integral with said tubular guide (31) and coaxial with it and at least one sleeve (41) integral with said pin and coaxial with it, the opposed ends of said sleeves being provided with complementary inclined surfaces (40a, 41a) that  
25 gradually become engaged with each other and reduce the oscillation possibility as the distance between them becomes smaller until they eventually come to constitute a perfect fit that locks every possibility of one end rotating with respect to the other.

30 10. A seat in accordance with claim 9, wherein a first sleeve (40) with an inclined end (40a) is coaxially fixed to one end of said tubular guide (31) and a second sleeve

- 15 -

(41) with a complementary inclined end (41a) is counterposed to the first and coaxially integral with one end of said pin (10), said pull wire (42) being connected to the other end of said pin and elastic means (43) being interposed between this latter end of said pin and the end of said tubular guide (31) opposite to the one to which said first sleeve (40) is attached.

11. A seat in accordance with Claim 3, wherein said supporting structure has parts (2, 3) integral with said saddle support (1) and parts (25) integral with said upright (11), the part integral with said upright being provided with longitudinal linkage elements (25) rigidly connected to said upright and converging onto two coaxially opposed pins (23, 24) that are rotatably connected to the part of the supporting structure rigidly connected to said relatively soft support.

12. A seat in accordance with any one of Claims 4 to 7, wherein said means for locking the oscillation of the pin also make it possible to regulate the amplitude of the oscillation and comprise two sleeves (50, 51) with inclined ends (50a, 51a) coaxially fixed to the two ends of said tubular guide (31) two corresponding sleeves (52, 53) with complementary inclined ends (52a, 53a) being coaxially fixed to the ends of said pin (10), there being provided a remote manually actuated tension cable (54, 55) and has its ends connected to the ends of said pin, said tension cable being slidably supported said upright, so that pulling said tension cable in one direction or the other will cause said pin to slide relatively forward or backward until it reaches the two limit positions of complete forward displacement or complete rearward displacement of the seat in which the respective pairs of



- 16 -

the inclined ends of said sleeves constitute perfect fits, thus preventing any relative rotation, whereas in the intermediate position relative rotation is possible with an increasing amplitude that depends on the distance between said inclined ends of said sleeves.

13. A seat in accordance with claim 12, wherein from said pin (10) there extends a tooth (57) that projects within a longitudinal slot provided on said tubular guide (31) capable of becoming engaged with a vault delimited by an arcuate portion (30a) bridging said tubular guide to prevent the rotation of said pin in an intermediate position between said extreme forward position of the seat and its extreme rearward position.

14. A seat in accordance with claim 1, wherein said pin (10) is slidingly and rotatably engaged in a longitudinal groove (62) integral with said supporting structure (2), there being provided, integral with said structure (2), pulling means (63, 64) for controlling the sliding in both directions and means (65) for locking the oscillation.

15. A seat in accordance with claim 14, wherein said means for controlling the oscillation comprise a radial rib (66) arranged between two walls (68, 71, 72) situated at a gradually variable distance from each other.



16. A seat in accordance with claim 15, wherein said walls situated at a gradually variable distance from each other consist of a flared groove (67) of a substantially triangular section provided in a small block (68) that can slide with respect to said pin, said rib (66) being engaged in said groove.

17. A seat in accordance with claim 15, wherein said walls situated at a gradually variable distance from each other consist of the ends of two setting screws (72, 73) axially



- 17 -

facing to each other and screwed into walls integral with said structure (2).

18. A seat in accordance with Claim 14, wherein said means for controlling the oscillation comprise a longitudinal groove (73) provided on said pin (10) and a prismatic tooth (74) of a substantially triangular section that can gradually become engaged within said groove (73).



2/5

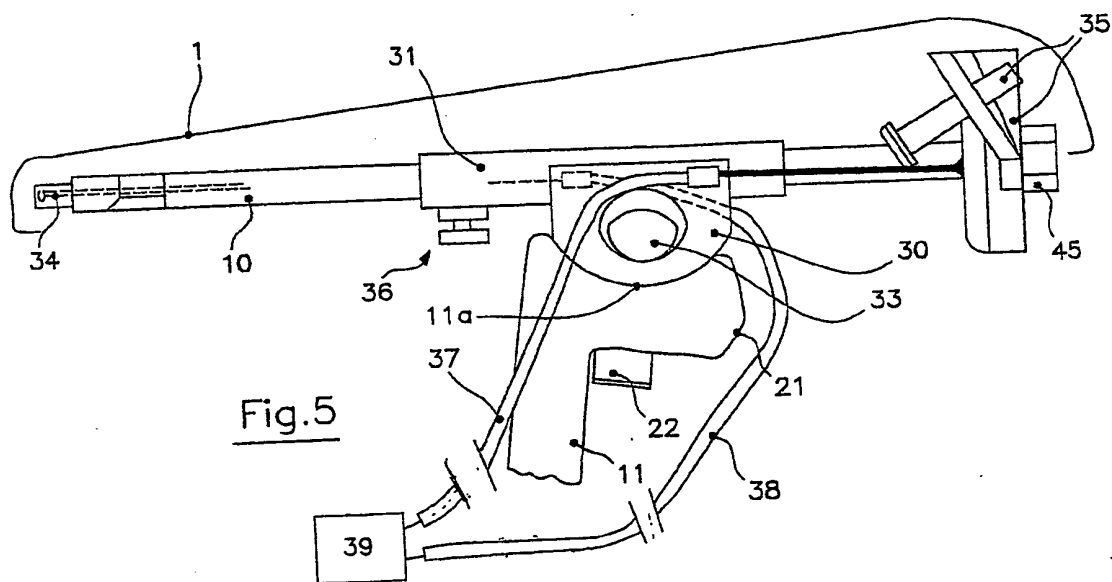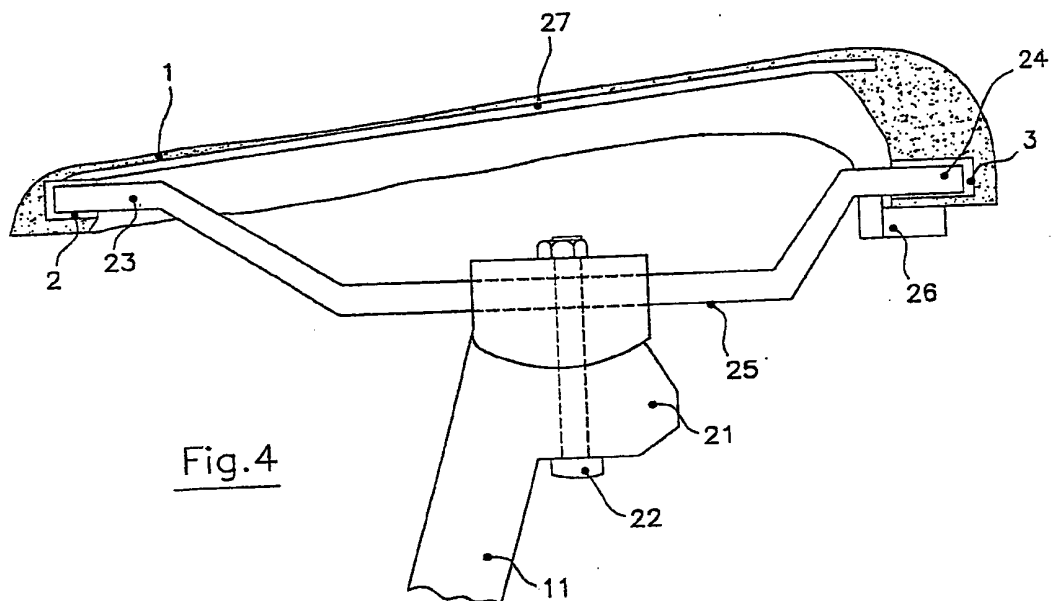

3/5

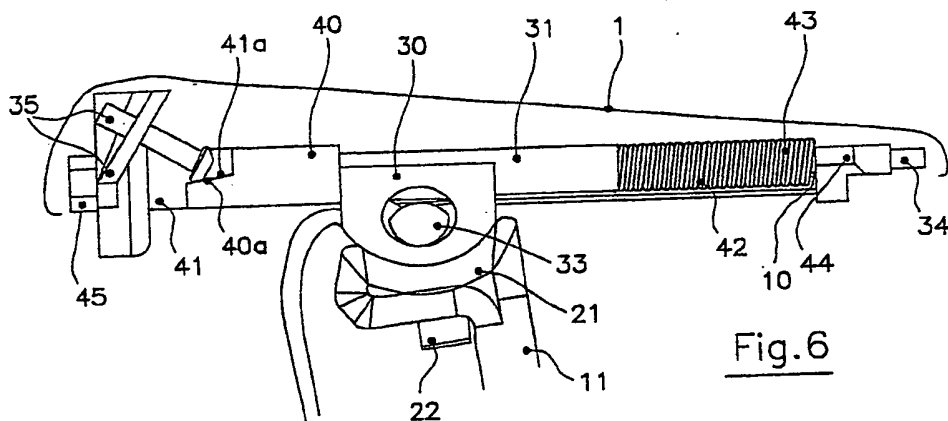


Fig. 6






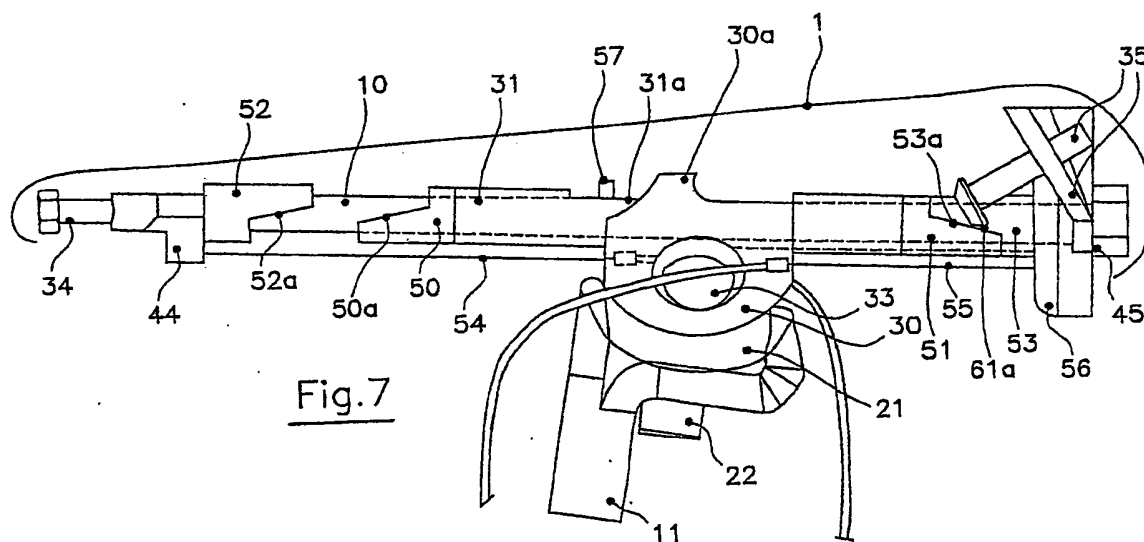


Fig. 7

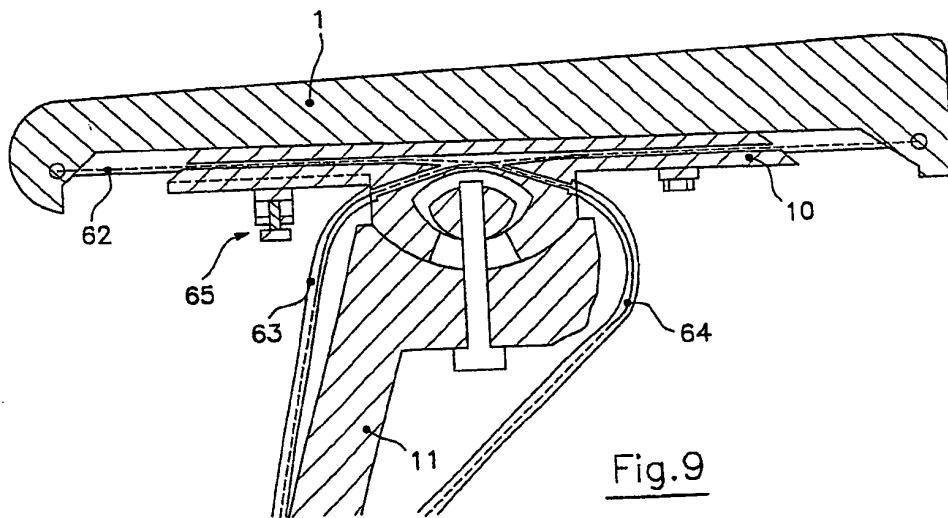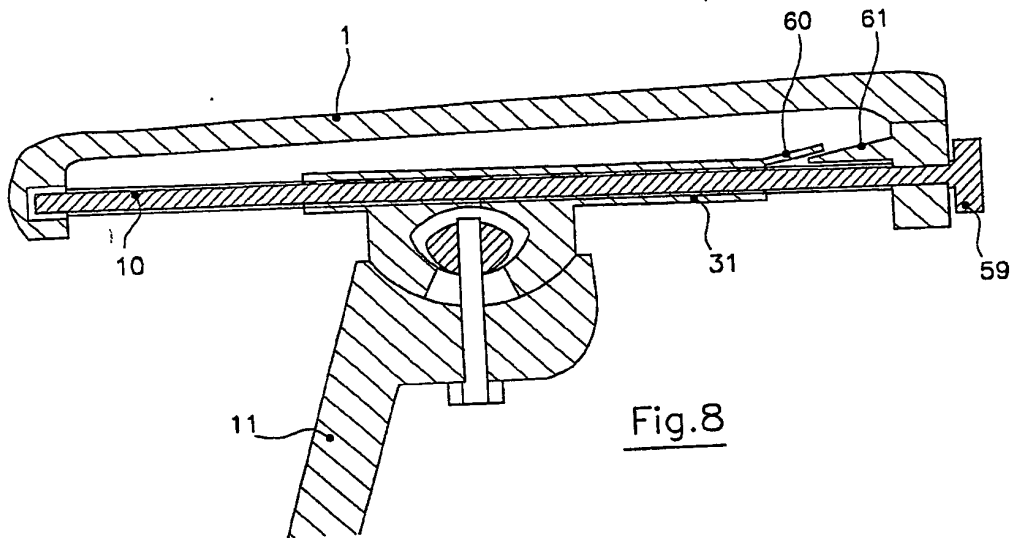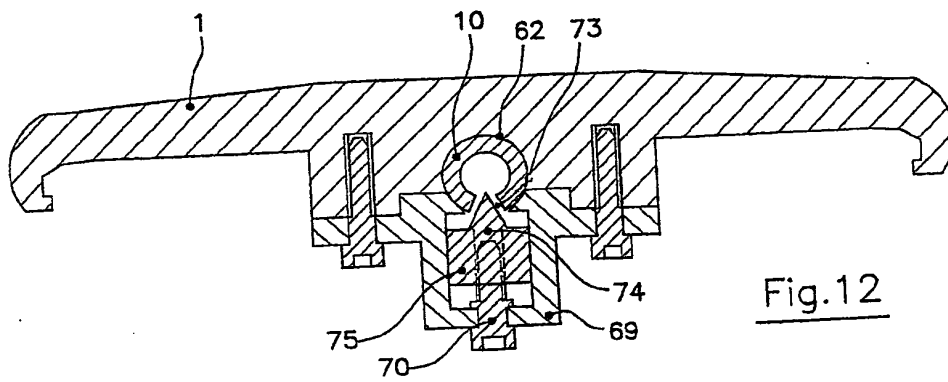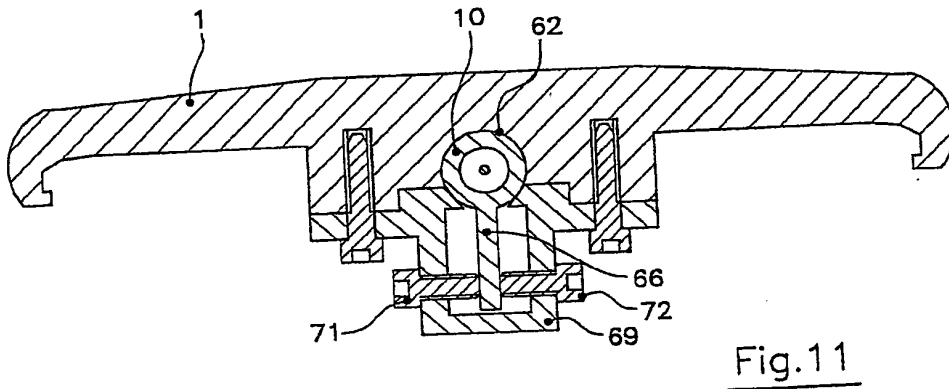

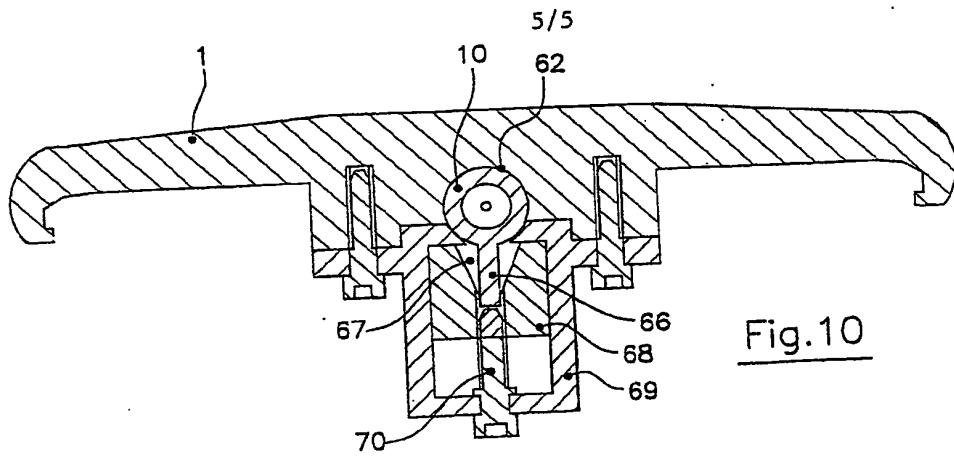

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/IT 03/00440

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 B62J1/04 B62J1/00

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B62J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 091 016 A (OREN GIDEON ; RABINOVITZ NOAH (IL)) 12 October 1983 (1983-10-12) page 4, line 19 - line 21; figures 1-3	1,2,4
A		14
X	US 6 056 356 A (UNGER JR JOSEPH F) 2 May 2000 (2000-05-02) column 3 - column 4; figures 1-6	1,2,5
A	US 5 048 891 A (YACH THOMAS L) 17 September 1991 (1991-09-17) column 5 - column 12; figures	1-6,8
A	FR 2 478 009 A (PERACHE ROBERT) 18 September 1981 (1981-09-18) the whole document	1,4,5,14
	---	
	--- -/--	

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

## \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*&\* document member of the same patent family

Date of the actual completion of the international search

22 October 2003

Date of mailing of the international search report

29/10/2003

Name and mailing address of the ISA  
European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Jung, W



## INTERNATIONAL SEARCH REPORT

International Application No.

PCT/IT 03/00440

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 921 624 A (WU CHIN-CHANG) 13 July 1999 (1999-07-13) the whole document ---	1, 2, 14
A	AT 41 144 B (TICHY FERDINAND) 25 February 1910 (1910-02-25) the whole document ---	1, 5
A	DE 41 39 284 A (MENZE SEN HEINRICH) 3 June 1993 (1993-06-03) the whole document ---	1, 6
A	GB 516 832 A (DUNLOP RUBBER CO; HENRY FRANCIS RYAN) 12 January 1940 (1940-01-12) the whole document -----	1

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Publication No.

PC17IT 03/00440

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0091016	A	12-10-1983	AR 229729 A1	31-10-1983
			AU 1321383 A	13-10-1983
			BR 8301703 A	13-12-1983
			EP 0091016 A2	12-10-1983
			ES 281821 U	16-04-1985
			JP 58180388 A	21-10-1983
			ZA 8301737 A	30-11-1983
US 6056356	A	02-05-2000	AU 745487 B2	21-03-2002
			AU 5772799 A	06-03-2000
			CA 2339754 A1	24-02-2000
			CN 1094445 B	20-11-2002
			EP 1104380 A1	06-06-2001
			JP 2002522297 T	23-07-2002
			WO 0009386 A1	24-02-2000
US 5048891	A	17-09-1991	DE 69031041 D1	14-08-1997
			DE 69031041 T2	19-02-1998
			EP 0498837 A1	19-08-1992
			WO 9106444 A1	16-05-1991
FR 2478009	A	18-09-1981	FR 2478009 A1	18-09-1981
			IT 1141334 B	01-10-1986
US 5921624	A	13-07-1999	NONE	
AT 41144	B	25-02-1910	NONE	
DE 4139284	A	03-06-1993	DE 4139284 A1	03-06-1993
			WO 9311026 A1	10-06-1993
			DE 59202958 D1	24-08-1995
			EP 0569570 A1	18-11-1993
			JP 6506648 T	28-07-1994
GB 516832	A	12-01-1940	NONE	